

S115 portable compressor

Compact, Sturdy
Easy to Maneuver

S115



Sullair **115** (7 m³/min - 246 CFM)

- SULLAIR air end **with 2-year warranty**
- **KUBOTA** water cooled **engine**
robust and reliable
- **Optimum accessibility** for Ease of Maintenance
- **Composite canopies** to withstand the rigours
of site abuse
- **Progressive control** for “on demand” Efficiency

Screw compressor



SULLAIR manufactured air end, built in compliance with the requirements of the standard **ISO 9001**.

Low running costs. The air end comes with a 2-year warranty.

Composite canopy



Made of ABS-ASA and polyethylene, these canopies boast numerous assets (high UV and weather stability). Canopy made of 5 different **easily replaceable** panels.

KUBOTA engine




Diesel water-cooled engines, well known for their **reliability**.

Their cooling system means they can be used in **high temperature or dusty environments**.

The S115 model is also fitted with a start control valve.

Full control panel

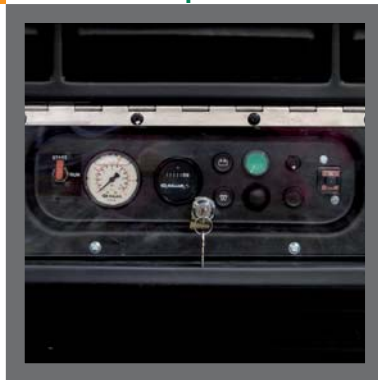

Transparent lockable door, including a pressure gauge, hour clock, preheating contact and signal lamp, safety and charge indicator lamps. **Accessible fuse box**.



S115

Air flow control

The progressive regulation control optimises the flow according to the air consumption. The no-load start does not lead to a surge on the starter.

Safety devices:

Safety systems:
 - engine water temperature
 - engine oil pressure
 - compressor air outlet temperature
 - safety device protects starter.

Statutory road signalling.

Air filters with safety cartridges

Positioned so as to recover the fresh air from outside:
 - engine filter
 - compressor filter

Tool box

To store a paving breaker, hose and steels.

Design

Easy to maneuver/handle road trailer. Easy access to all components.

Options :

- Corporate Canopy Colours available.
- 12/24 V transformer.
- Anti-theft chain.
- Fluid Catch tank.
- Line lubricator.
- Aftercooler.
- Hose Reel.

These products are made according to the most stringent standards within the scope of an ISO 9001 certified system.

Your **SULLAIR**. authorised distributor

SPECIFICATIONS

115

CE Compressor* model	115
Delivery (1) m ³ /min (cfm)	7 - (246)
Rated pressure, bar (psi)	7 - (100)
Compressor oil, liters	16
Body	
Fuel tank capacity, liters	90
Air outlets	3 x 3/4"
Optional air outlet	1 1/4"
Total weight wet (2) kg	1110
Maximum axle weight (2) kg	1300
Total length (2) m	3,10
Total width (2) m	1,56
Height (2) m	1,54
Kubota engine (3)	V 3300 TE
Number of cylinders	4
Displacement cm ³	3318
Rated speed, rpm	2200
Rated power kW (HP)	57 - (75)

(1) at rated pressure according to ISO 1217 (±5%).

(2) F = braked with adjustable tow bar. UK = a special straight brake is available. Consult us.

(3) turbo-diesel.